


Quadband Magnetic-Antenna GSM 800/900/1800/1900

Order-No.: 700-751-ANT02

Simple mounting by setting on all plain magnetical surfaces. High magnetical holding power.





Technical data:

Dimensions	88 x 29 mm
Weight	65 g
Temperature range	-40° C – + 80° C
Protection class	IP66 (acc. IEC 60529)
Cellular	
Frequency range AMPS:	824 – 894 MHz
GSM 900:	880 – 960 MHz
GSM 1800:	1710 – 1880 MHz
GSM 1900:	1850 – 1990 MHz
UMTS:	1900 – 2170 MHz
Impedance	50 Ohm
Gain	0 dB
Load capacity	max. 10 W pulsed, GSM standard
Cable type	RG 174
Cable length and connectors	2500 mm FME female

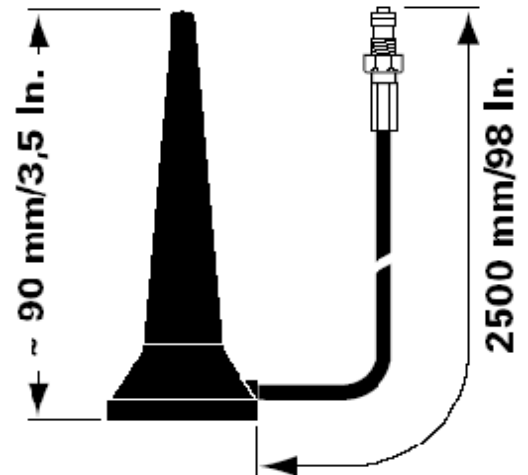

Antenna diagrams:

Typical VSWR

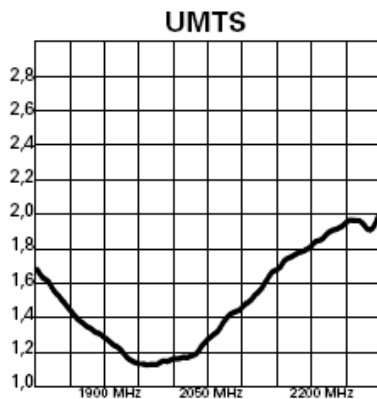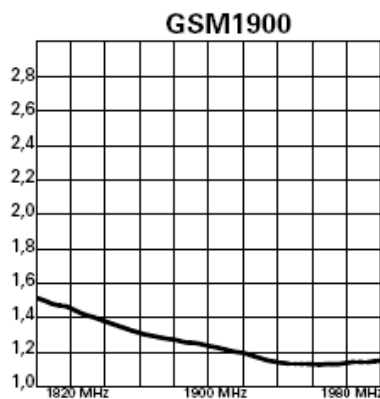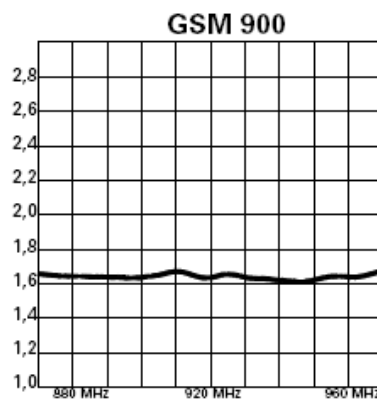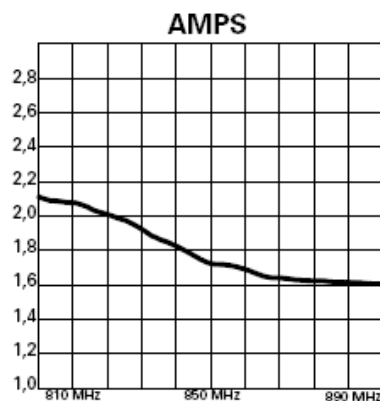

Technical alterations reserved